








**SPECIFICATIONS**

Rated Current:0.75AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: LCP  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

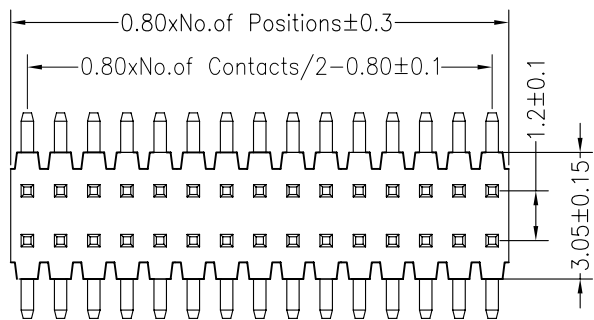

**Recommended P.C.B Layout(Top Side)**  
 (PCB BOARD TOLERANCE±0.05)

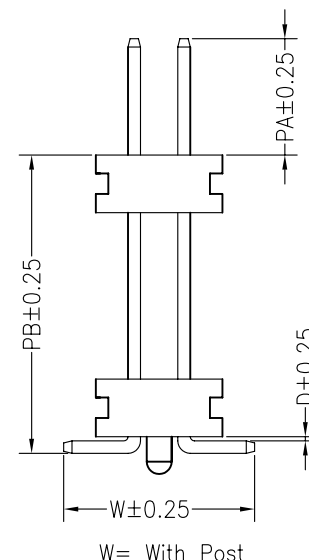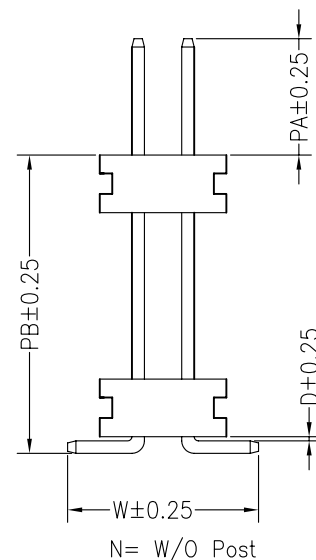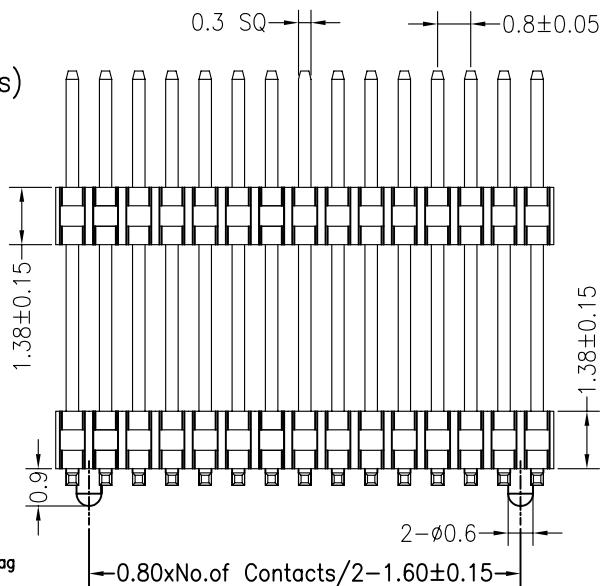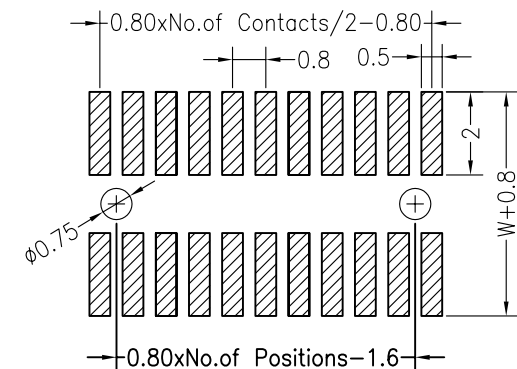

**Ordering Information**

1713 -22 XX X X XX M XXX X 01

|                                     |  |                                   |  |            |   |
|-------------------------------------|--|-----------------------------------|--|------------|---|
| No.of Pins Per Row<br>2x50<br>2~100 | Insulator Material Option<br>A=BK-PBT<br>B=BK-PA66<br>C=BK-PA6T<br>D=BK-PA46<br>F=BK-LCP | Post<br>W=With Post<br>N=W/O Post | Contact Plating<br>G0:Gold Flash<br>G2:5U" Gold<br>G3:10U" Gold<br>G4:15U" Gold<br>G5:30U" Gold<br>S0:Gold Flash/Tin<br>SN:Tin | Pin Length | Packing<br>0=PE Bag<br>A=Tray<br>T=Tube<br>P=Tube+Cap<br>R=Reel+Cap<br>M=Reel+Mylar |
|-------------------------------------|--|-----------------------------------|--|------------|---|

| ITEM      | PA   | D   | PB   | W    | L    |
|-----------|------|-----|------|------|------|
| Standard  | 2.80 | 0.1 | 3.20 | 4.60 | 7.40 |
| Alternate |      |     |      |      |      |

|     |            |                          |  |           |       |      |           |          |       |  |  |  |
|-----|------------|--------------------------|--|-----------|-------|------|-----------|----------|-------|--|--|--|
|     |            |                          |  | OPERATION |       | DRAW | YiYuSheng | 12.04.18 | SCALE | FIT                                      | <b>JiLN</b> ® 深圳市锦凌电子有限公司<br>SHENZHEN JINLING ELECTRONIC CO.,LTD<br>Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992 |  |
|     |            |                          |  | X.X       | ±0.30 |      |           |          | UNIT  | mm                                       |  |  |
|     |            |                          |  | CHECK     |       |      |           | SIZE     | A4    | PART NO. 171322XXXXXXMXXXX01             |  |  |
|     |            |                          |  | APPROVE   |       |      |           | SHEET    | 1/1   |  |  |  |
| A0  | 2012.04.18 | NEW DRAWING              |  |           |       |      |           | PROJ.    | ◆     | TITLE: 0.8*1.2mm Pin Header Dual Row SMT |  |  |
| REV | DATE       | MODIFICATION DESCRIPTION |  | CHANGE    | DIM   | TOL  |           |          |       |  |  |  |