

SPECIFICATIONS




Rated Current:0.75AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)


Ordering Information

1610 11 XX X X XX S XXX X 0X

No. of Pins Insulator Material Post Contact Plating Pin Length Packing
 Per Row Option W=With Post G1:1U" Gold O=PE Bag
 2x50 A=BK-PBT N=W/0 Post G2:1.5U" Gold A=Troy
 2~100 B=BK-PA66 C3:2U" Gold T=Tube
 C=BK-PA6T G4:3U" Gold P=Tube+Cap
 D=BK-PA46 G5:5U" Gold R=Reel+Cap
 E=BK-PA9T S0:Gold Flash/Tin M=Reel+Mylar
 F=BK-LCP SN:Tin

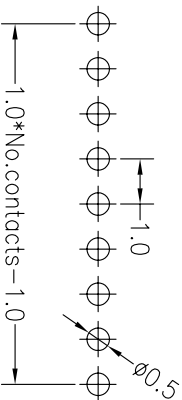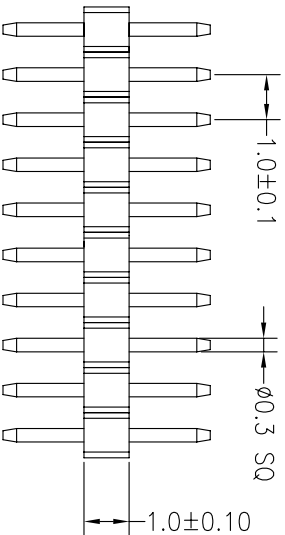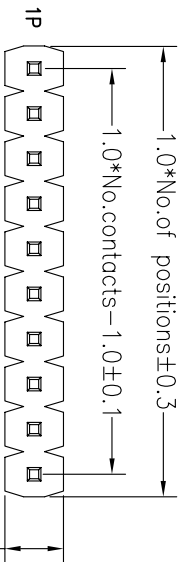

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)



Dimension antitheses list			
ITEM	PA	PC	L
Standard	2.00	2.00	5.00
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	BEN	SCALE	FIT	PART NO.	TITLE:
A0	2012.03.28	NEW DRAWING		X.X ±0.30		12.03.28	mm	A4	161011XXXXXXSXXXXX	1.0mm Pin Header H1.0mm 180°
				X.XX ±0.20	CHECK			1/1		
				X.XXX ±0.10						
				Angle ±3°	APPROVE					
				DIM TOL						

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992