

SPECIFICATIONS





Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

1420 11 XX X N XX S XXX X 01

No. of Pins Per Row 1*50
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating:
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Pin Length
 Packing:
 0=PE Bag
 A=Trey

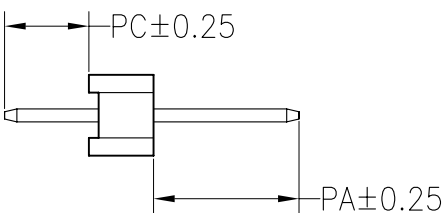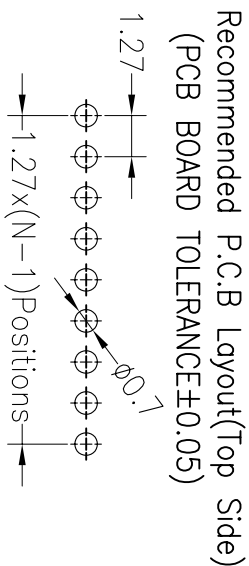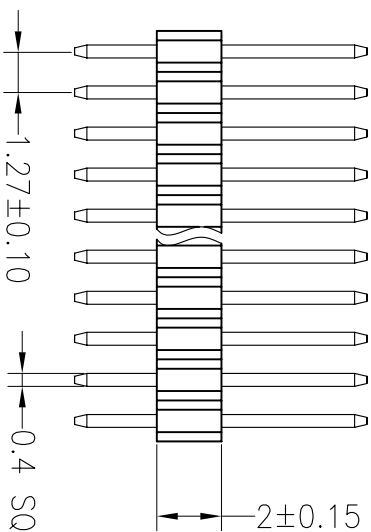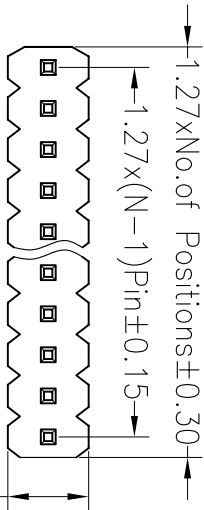

Dimension antitheses list			
ITEM	PA	PC	L
Standard	1.80	3.00	6.80
Alternate			

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Y.YuSheng	12.03.28	UNIT	mm	mm	A4	142011XXXXXXSXXXX01	
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1		
X.XXX	±0.10			SHEET	1/1	PROJ.			
Angle	±3°	APPROVE							
DIM	TOL								

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

1.27PH H2.0mm 1xNpin 180°