




FILE NO: 8382810


**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)




TYPE02

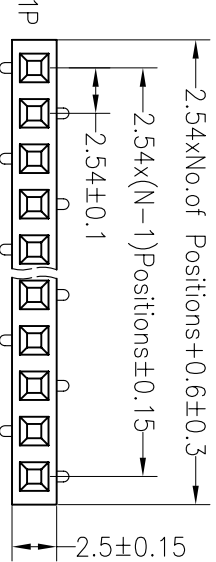

TYPE01

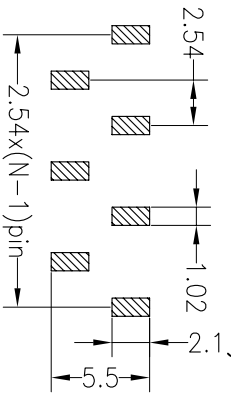

Recommended P.C.B. Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)





TYPE01

**Ordering Information**

2250 01 XX X N XX M U X 01

- No. of Pins Per Row: 1\*40
- Insulator Material Option:
  - A=BK-PBT
  - B=BK-PA66
  - C=BK-PA6T
  - D=BK-PA46
  - E=BK-PA9T
  - F=BK-LCP
- Contact Plating:
  - G0: Gold Flash
  - G2: 5U" Gold
  - G3: 10U" Gold
  - G4: 15U" Gold
  - G5: 30U" Gold
  - S0: Gold Flash/Tin
- Packing:
  - 0=PE Bag
  - A=Troy
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap
  - M=Reel+Mylar

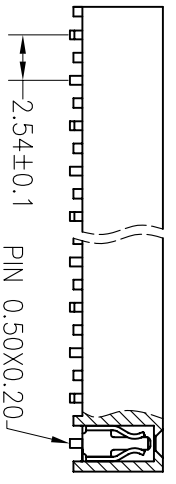

OPERATION		DRAW		SCALE		PART NO.	
X.X	±0.30	YHUSheng	12.03.28	UNIT	FIT	mm	225001XXXXXXMUXX
X.XX	±0.20	CHECK		SIZE	A4		
X.XXX	±0.10			SHEET	1/1		
Angle	±3°	APPROVE		PROJ.			
DIM	TOL						
MODIFICATION DESCRIPTION		CHANGE		TITLE:		2.54PF H5.0mm 1xNpin SMT W4.8	
REV	DATE						
A0	2012.03.28	NEW DRAWING					
1							

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992