HSF RoHS

FILE NO :E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

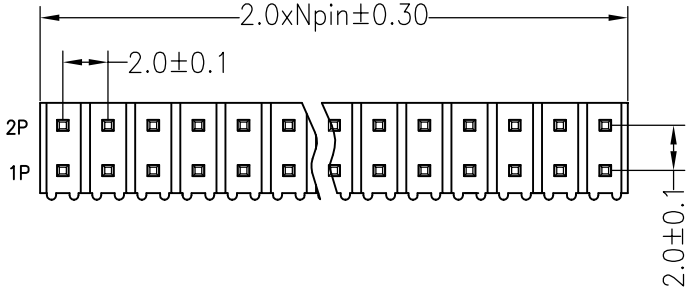

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

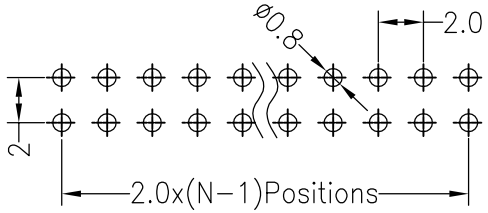

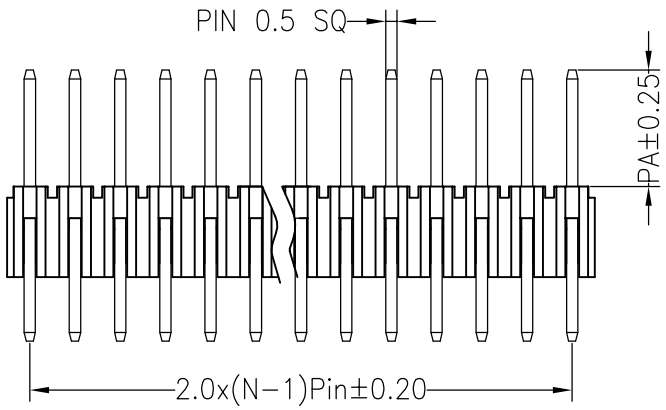

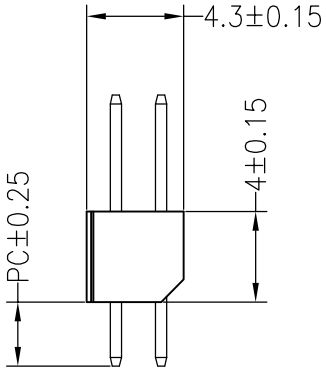

Ordering Information

1340 12 XX X N XX S XXX X 01

- 12: No.of Pins Per Row 02~40P
- XX: Insulator Material Option
  - A=BK−PBT
  - B=BK−PA66
  - C=BK−PA6T
  - D=BK−PA46
  - F=BK−LCP
- XX: Contact Plating
  - G0:Gold Flash
  - G1:1U" Gold
  - G2:1.5U" Gold
  - G3:2U" Gold
  - G4:3U" Gold
  - G5:5U" Gold
  - G6:10U" Gold
  - G7:15U" Gold
  - S0:Gold Flash/Tin
  - SN:Tin
- XXX: Pin Length
- X: Packing
  - 0=PE Bag
  - A=Tray
  - T=Tube
  - P=Tube+Cap
  - R=Reel+Cap
  - M=Reel+Mylar
- 01: code stream 01~99

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	4.00	10.80
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.09.19	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	YiYuSheng	19.09.19
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	134012XXXNXXSXXXX01
TITLE:	2.0PH 2xNpin H4.0mm 180°