
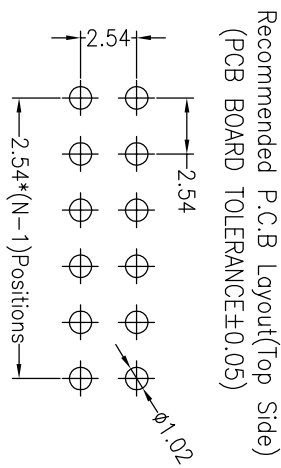


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

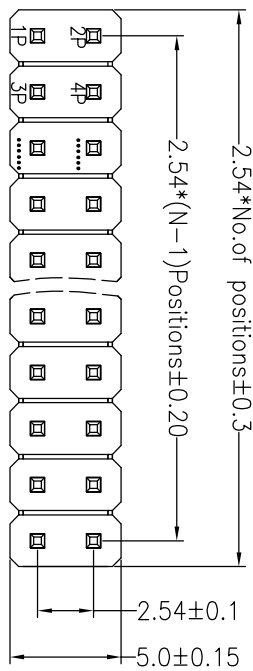

Ordering Information

1225 22 XX X N XX S XXX X 0X

No. of Pins Per Row: 2x40
 Insulator Material Option:
 A=BK-PBT
 C=BK-PA6T
 D=BK-PA66
 E=BK-PA9T
 F=BK-LCP
 Contact Plating:
 G0:Gold Flash
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 G6:10U" Gold
 G7:15U" Gold
 S0:Gold Flash/In
 SN:In
 Pin Length:
 Pocking:
 0=PE Bog
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Myfor

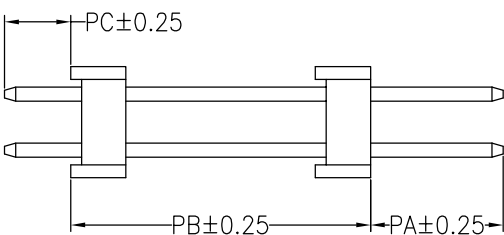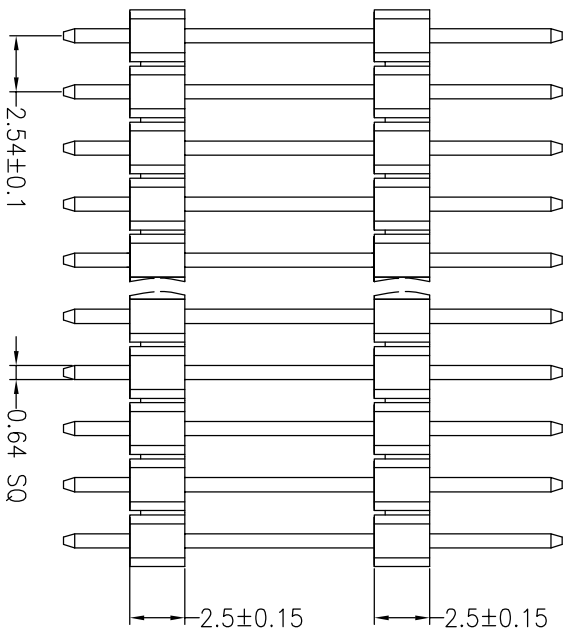

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	7.00	13.00	3.00	23.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.10.28	NEW DRAWING	

OPERATION		SCALE	FIT
X.X	±0.30	UNIT	mm
X.XX	±0.20	SIZE	A4
X.XXX	±0.10	SHEET	1/1
Angle	±3°	PROJ.	☉

DRAW	chengyigong	19.10.28	JILIN 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892	
CHECK			PART NO.	122522XXXXXXX0X
APPROVE			TITLE:	2.54PH Dual Row Double Plastic 180° H=2.5