

HSE RoHS



Connector Specifications

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PBT(UL94V-0)

Wire Specifications
 Insulator Material:PVC
 Conductor:7/0.127(0.10)mm(Tin Plated Copper)

Testing
 Contact Resistance:30 Max.
 Insulation Resistance:10MΩ Min.
 Withstand Voltage:DC300V, 5second

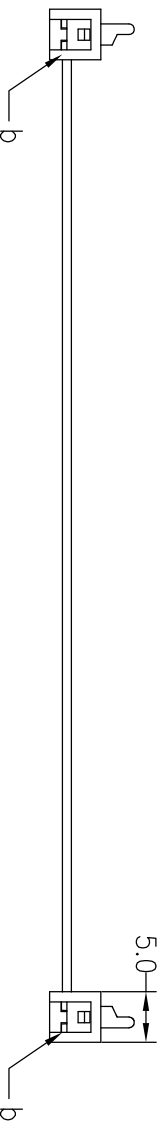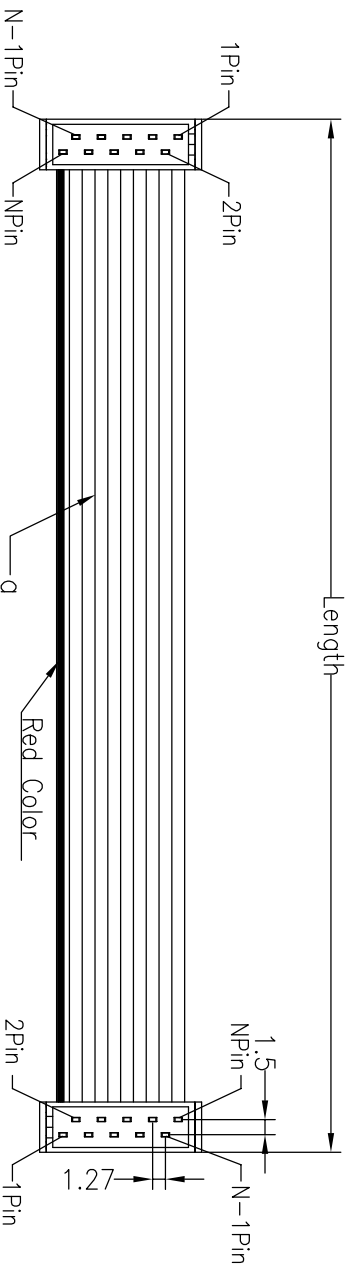

Length	Tolerance
≥100	±3
100~500	±5
>500	±10

Ordering Information

FMA - XX SN B R XXX - 02

No. of Pins 4P~26P Contact Plating SN:Tin Insulation Color R=Red Length 100=100mm

NO.	Specification	Q'TY	UNIT
b	1.27 NP Micro Match IDC-Type Red PBT Sn 无缺口	2	PCS
a	UL2651 28awg PH1.27 NPin Wires Red Marking Grey Side	XXX	MM

Specification

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. FMA-XXSNBRXXX-02

TITLE: Micro Match(红色IDC) Flat Cable

OPERATION	DRAW	BEN	12.03.28	SCALE	FIT	SIZE	SHEET	PROJ.
X.X	±0.30			UNIT	mm	A4	1/1	
X.XX	±0.20	CHECK						
X:XXX	±0.10							
Angle	±3°	APPROVE						
DIM	TOL							

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			