



SPECIFICATIONS

Rated Current: 0.75AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 240°C for 30-60 seconds
 (260°C for 10 seconds)

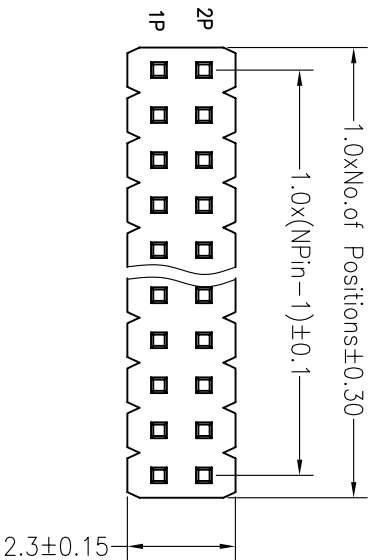

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE ±0.05)

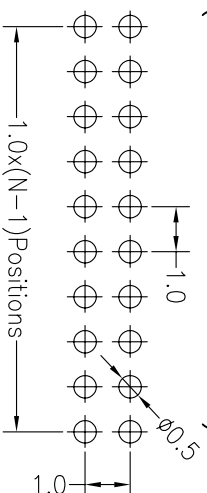



Ordering Information

1610 22 XX X N XX S XXX X 01

No. of Pins Per Row: 2x1~2x50
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA01
 D=BK-PA46
 F=BK-LCP

Contact Plating:
 G0: Gold Flash
 G1: 3U" Gold
 G2: 5U" Gold
 G3: 10U" Gold
 G4: 15U" Gold
 G5: 30U" Gold
 S0: Gold Flash/Tin
 SN: Tin

Pin Length:
 O=PE Bag
 A=Tray
 T=Tube
 R=Top & Reel
 M=Reel+Mylar

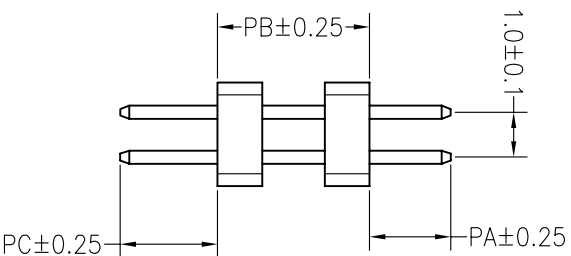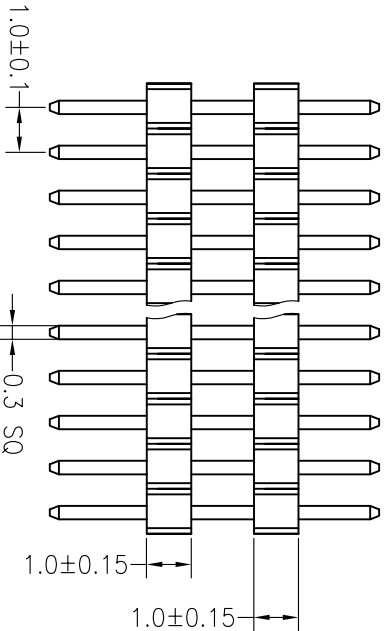

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	1.80	2.00	1.80	5.60
Alternate				

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	YTYuSheng	12.04.19	SCALE	FIT	PART NO.	TITLE:
A0	2012.04.19	NEW DRAWING		X.X ±0.30	CHECK			mm	A4	161022XXXXXXX01	1.0PH Dual Row H1.0mm 180°
1				X.XX ±0.20				mm	1/1		
				X.XXX ±0.10	APPROVE			SHEET	1/1		
				Angle ±3°				PROJ.			
				DIM	TOL						