

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

NAME	DIM L	DIM L1
Long Latch	24.00	11.50
Short Latch	21.20	8.70

Ordering Information




3921 **XX** **XX** **W** **X** **X** **A** **01**

No. of Pins
8--64P

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Insulator Color
B=Black
G=Grey

Latch Type
L=Long Latch
S=Short Latch

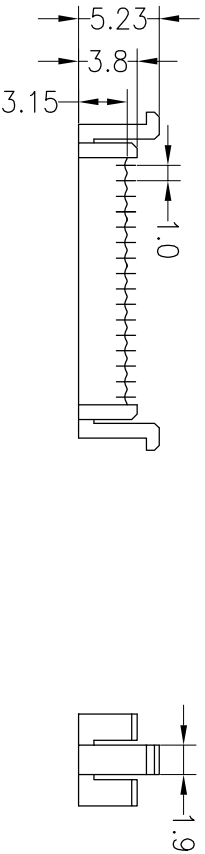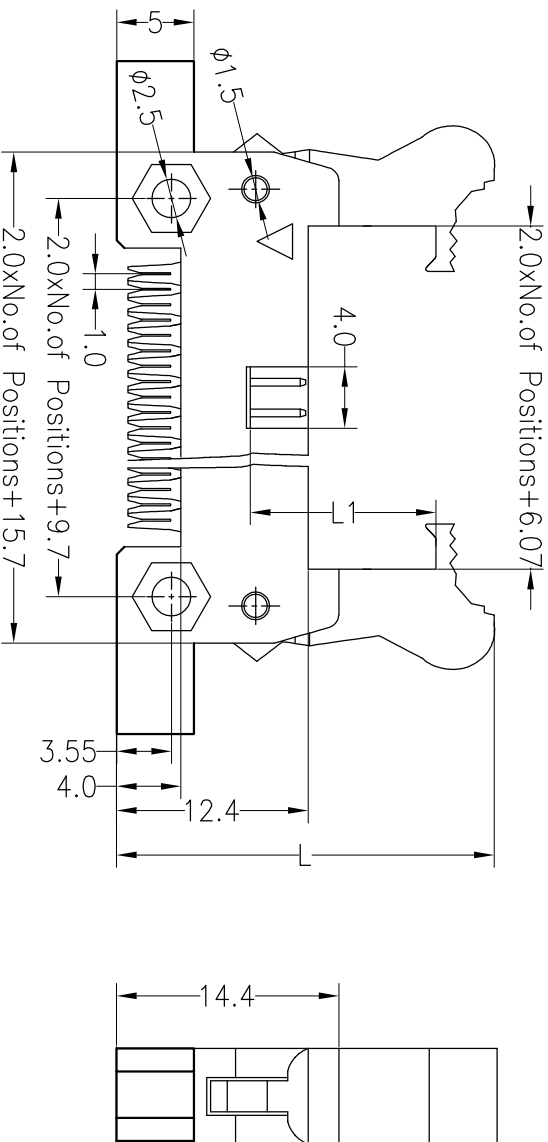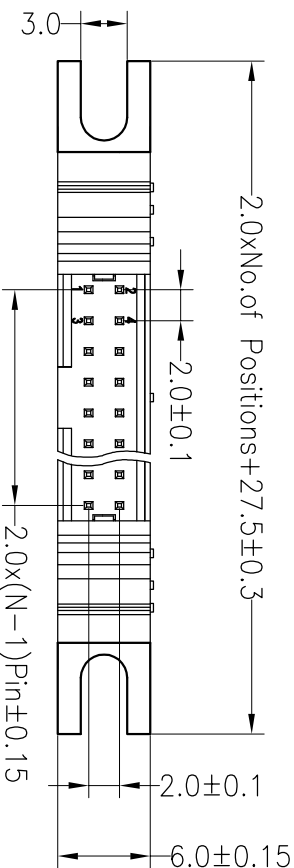

OPERATION	X.X	±0.30	DRAW	YYuSheng	16.11.20	SCALE	FIT	UNIT	mm	PART NO.	3921XXXXXXA01	SHEET	1/1	TITLE:	2.0mm Ejector Header IDC-TYPE		
	X.XX	±0.20		CHECK													SIZE
ANGLE	X:XXX	±0.10	APPROVE														
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			DIM	TOL										
A0	2016.11.20	NEW DRAWING															
1																	

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892