HSF RoHS

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass/Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PBT
Max.Processing Temp: 180°C for 30−60 seconds
(200°C for 10 seconds)

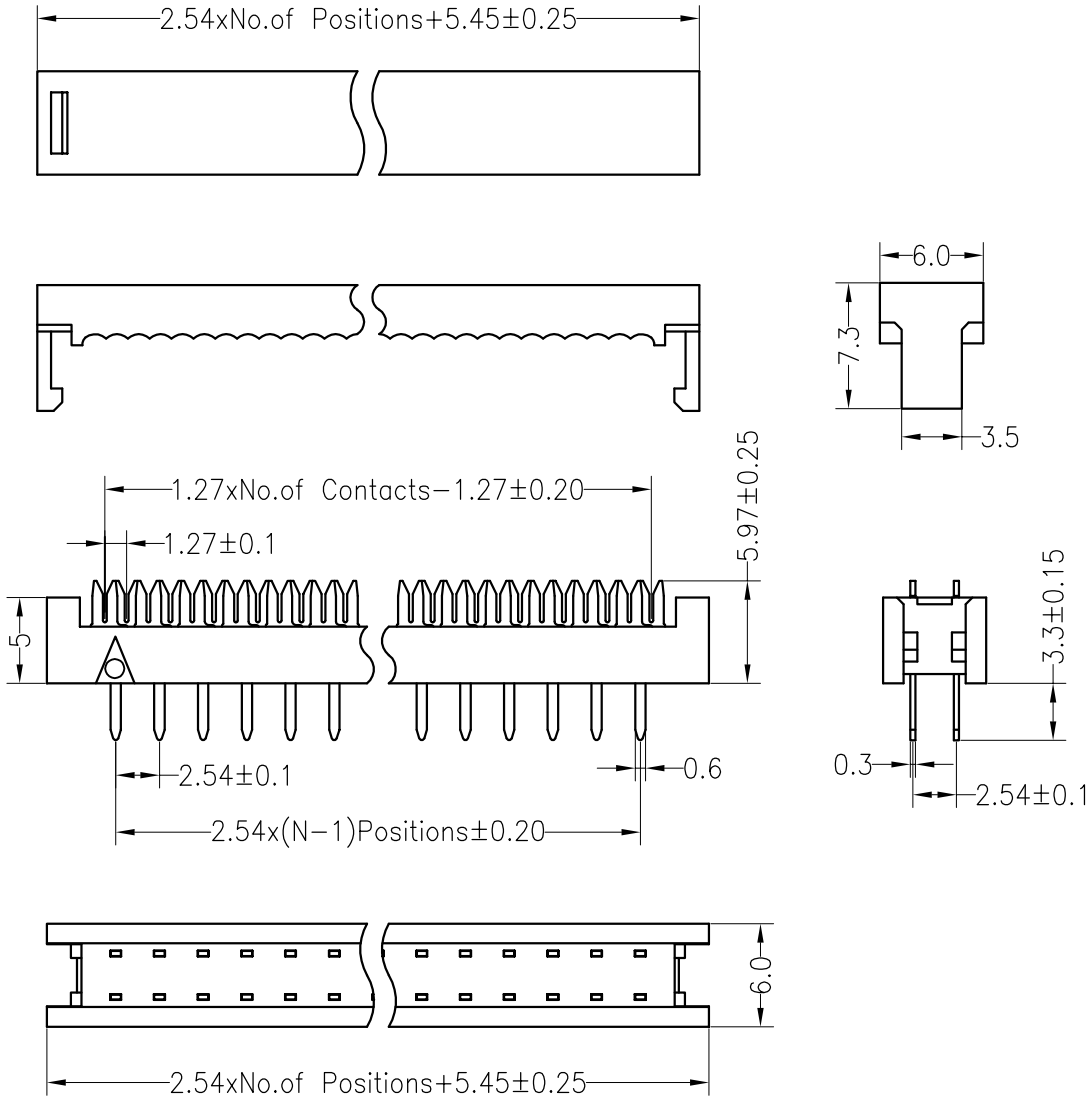

Ordering Information

5410 XX X XX X 01

- No.of Pins: 06~64P
- Contact Material: B=Brass; P=Phosphor Bronze
- Contact Plating: G0:Gold Flash; G1:3U"Gold; G2:5U"Gold; G3:10U"Gold; G4:15U"Gold; G5:30U"Gold; S0:Gold Flash/Ni
- Color Type: B=Black; G=Grey

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2019.01.15	NEW DRAWING	

OPERATION		DRAW	yiyusheng	19.01.15
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	5410XXXXXX01
TITLE:	2.54 DIP NPin two type